


## TYTON® - Steckmuffen - Verbindung nach DIN 28 603

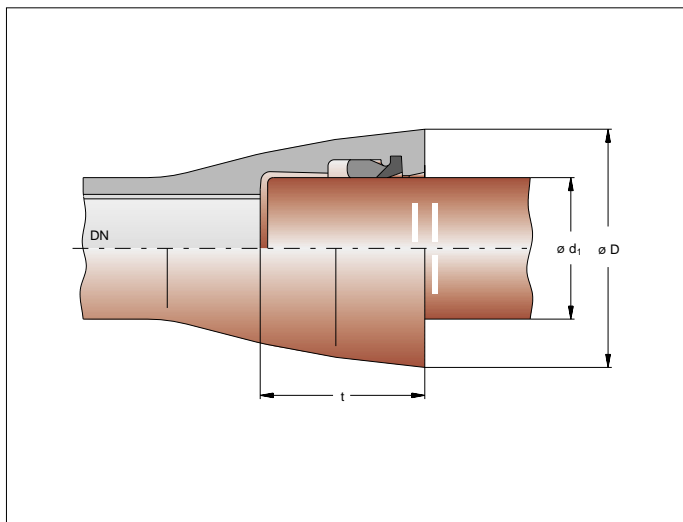

DN	ø d <sub>1</sub> mm	ø D <sup>1)</sup> mm	t <sup>2)</sup> mm	Abwinkelung
100	118	163	88	5°
125	144	190	91	5°
150	170	217	94	5°
200	222	278	100	5°
250	274	336	105	5°
300	326	393	110	5°
350	378	448	110	4°
400	429	500	110	4°
500	532	604	120	3°
600	635	713	120	3°
700	738	863	197	3°
800	842	974	209	3°
900	945	1082	221	3°
1000	1048	1191	233	3°

<sup>1)</sup> Richtwert

<sup>2)</sup> Abweichung möglich